

## 8.8 Overfill Alarm

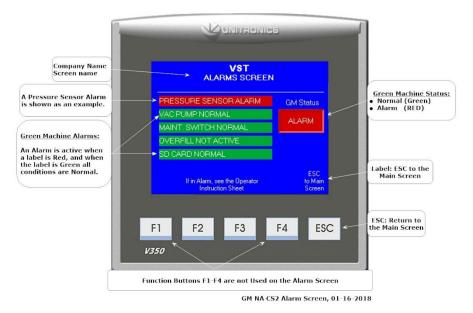


Figure 8-17: GREEN MACHINE Controller Alarm Screen

- A VST Control Panel Controller Overfill Alarm is Active when the Fuel Management System Overfill Alarm is Active. **See Figure 8-17**.
- An overfill condition exists when, during a fuel drop, the gasoline level in the UST exceeds the Overfill Alarm setting, which is 90% capacity of the UST. See Figure 8-18.
  - The VST Control Panel is connected to the Tank Overfill Alarm output relay.
  - When an overfill occurs, the output (N.O.) relay closes and GREEN MACHINE will turn OFF.
  - The Overfill Alarm box will display RED indicating an Overfill Alarm is active.
  - When the gasoline level drops below the Overfill Alarm level, the output relay opens and the alarm clears. The GREEN MACHINE will remain OFF for 2 additional hours.
  - After the 2-hours elapse:
    - The Overfill Alarm box will not be shown on the Fault and Alarm Screen.
    - The GREEN MACHINE will turn ON if the UST pressure is above 0.2 IWC.
    - The GREEN MACHINE will remain OFF if the UST pressure is below 0.2 IWC.




## 8.8.1 Overfill Alarm Troubleshooting Steps

Steps	Procedures

- 1. An overfill may cause the Vacuum Pump to seize, which may cause the Vacuum Pump motor to trip out on the thermal overloads.
- 2. If an Overfill Alarm Activates while a test is running:
  - The test will terminate.
  - The Fault and Alarm Screen is displayed and the Overfill Alarm box will display RFD.
  - An underground storage tank overfill is a serious situation that could damage internal components in the GREEN MACHINE.
  - An overfill might happen if the delivery person fails to stop fueling, ignoring both the overfill limit and the high-product limit.
  - VST has determined that overfill protection is needed to reduce the chance of gasoline entering the GREEN MACHINE.
  - Below are the precautionary measures taken to protect the GREEN MACHINE against an overfill situation:
    - The VST Control Panel will disable the GREEN MACHINE when the UST level reaches the OVERFILL Alarm setting (OVERFILL: 90%) when the relay contacts close at the Fuel Management System.
    - Eventually, as fuel is dispensed, the product would drop below the OVERFILL Alarm threshold thereby resetting the relay and re-enabling the GREEN MACHINE.
    - The Fuel Management System OVERFILL ALARM will not guarantee that the GREEN MACHINE is protected from gasoline entering it.
- 3. The table below lists the VST recommended alarm settings for the tank level.

Position of Tank Alarm	VST Recommended Alarm	
Limits	Settings	
Overfill Limit	90%	



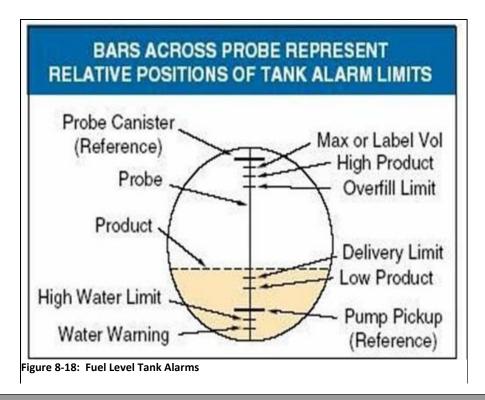

Overfill Report					
Date:					
Contractor Name:					
Contractor Company:					
GDF Name:					
Address:					
City:	State:		ZIP Code:		
GDF Contact Person Nar	ne:				
GDF Contact Person Title	e:				
GDF Contact Person Pho	ne:				
GDF Contact Person E-m	nail:				
Overfill Details					
Date of Overfill:					
Octane of the fuel being dispensed:					
Serial Number of the GREEN MACHINE:					